

Design and Development of Dual Mass Flywheel for Improving Energy Storage Capability

D. G. Dighole, Prof. R.S. Shelke, Prof. Dr. S.N. Shelke

Abstract— The rapid developments of vehicle technology over the last few decades, flywheels have been used to achieve smooth operation of machines. The early models were purely mechanical consisting of only a stone wheel attached to an axle. Nowadays, flywheels are complex constructions where energy is stored mechanically and transferred to an integrated motor/generator. The stone wheel has been replaced by a steel or composite rotor and magnetic bearings have been introduced. Today flywheels are used as supplementary UPS storage at several industries world over. Flywheels serve as kinetic energy storage and retrieval devices with the ability to deliver high output power at high rotational speeds as being one of the emerging energy storage technologies available today in various stages of development, especially in advanced technological areas, that is spacecrafts.

Today, most of the research efforts are being spent on improving energy storage capability of flywheels to deliver high power transfer, lasting longer than conventional battery powered technologies. This study solely focuses on exploring the effects of dual mass flywheel geometry for improving energy storage capability to deliver high power transfer per unit mass, as compared to conventional flywheel. Dual mass flywheel also reduces the weight of the flywheel using composite materials. In this study using the two spring two mass system to produce useful vibrations which will be employed to increase the inertia of the system and thereby enable to reduce the weight of existing flywheel or increase power output using existing weight of flywheel.

Index Terms— Arc spring, Dual Mass Flywheel, Energy storage capacity, Increase power output

I. INTRODUCTION

A flywheel is a mechanical device which is used as a storage device for rotational energy called as kinetic energy. It helps to resist changes in their rotational speed of engine, when fluctuating torque applied on shaft by source it helps to keep steady the rotation of the shaft. Flywheels have become the subject of extensive research as power storage devices for uses in vehicles. Flywheel energy storage systems are considered to be an attractive alternative to electrochemical batteries due to higher stored energy density, higher life term and deterministic state of charge and ecologically clean nature. Flywheel is basically a rechargeable battery. It is used to absorb electric energy from a source, store it as kinetic energy of rotation and then deliver it to a load at the appropriate time in the form that meets the load needs. As shown in Fig.1 a typical system consists of a flywheel, a

motor/generator and controlled electronics for connection to a larger electric power system.




Fig. 1 Basic components of flywheel wheel energy storage system

Fig.1 shows basic components of flywheel energy storage system the input power may differ from the output power. It is converted by the input electronics into a form appropriate for efficiently driving a variable-speed motor. The motor rotates the flywheel, which stores mechanical energy that is rotational energy generally called as kinetic energy and this energy delivers to a load. The mechanical energy is then converted into electrical energy by the generator. The variable-frequency electronics output from the generator is converting into the electric power. Since the input and output are typically separated in a timely manner, mostly the motor and generator combine into a single machine, and place the input and output electronics into a single module, to reduce weight and cost. Modern high-speed flywheels differ from their forebears in being lighter and spinning much faster.

A. Introduction of dual mass flywheel

If the power output of an engine is measured first with light flywheel and then again with the standard part on an engine dynamometer, not changes in power observed. At first it appears that the light flywheel has done nothing and was a total waste of cash. This is not the case. A dynamometer that shows maximum power at constant revolutions does not demonstrate what happens to an engine's power output in real life situations like acceleration. If an engine is accelerated on a dynamometer (talking about a rate of around 2000 rpm) it would show a power output is around 20%-25% less than at the constant revolution state. The reason for this is that when accelerating a vehicle the engine not only has to push the total mass of the car but the internal components of the engine need to be accelerated also. This tends to absorb more power as the extra power is used accelerating the internal mass of the engine components and is why a motor accelerating on a dynamometer will produce less power than at constant revolutions. Also it must be remembered that the rate of acceleration on the engine internals is much greater than the rest of the car. This would then suggest that by lightening the flywheel, less power

would be required to accelerate it and therefore more power would be available to push the car along.

All engines have flywheels or weighted crankshafts that balance out compression and power strokes, maintain idle, aid starting and reduce component wear. If the flywheel is too light the motorcycle requires more effort to start, idles badly and is prone to stalling. Weight is not the important factor here but inertia. Due to inertia of flywheel energy is stored in it and is not directly proportional to flywheel weight. It's possible to have a light flywheel with much more inertia than a heavier flywheel. Any power the motor develops must accelerate the flywheels before leaving the sprocket shaft and any used in bringing the flywheel up to speed is not available at the rear wheel. This will not show up on a steady-state or rear wheel dyno or simple desk-top dyno program but is detectable in a transient dyno that accelerates the engine at a specific rate (300 or 600 rpm per second are common). Flywheel inertia is stored when you revolve the engine slightly before letting the clutch out - this small amount of extra power helps in getting the motorcycle underway with minimal effort. By "borrowing" power for a few seconds the engine has to develop less to move from a standing start. Once the clutch is completely engaged, inertia can no longer be borrowed - the motorcycle can only use what it produces in "real time". In any event except for when the clutch is slipped all flywheel weight reduces acceleration.

As per study the above discussion we can say that the flywheel inertia plays a major role in vehicle to optimized performance. The arrangement of the dual mass flywheel is a solution to the above problem statement where in the inertia is increased using two set of masses phased opposite to each other.

The arrangement of the dual mass flywheel is best explained by the mathematical model below the model is a two spring two mass models graphically represented as below. The Fig. 1 shows free un-damped vibrations set up of two mass- two spring systems. As shown in the figure the input to the system is in the form of a low energy intermittent input from any power source (excitation), this results in free un-damped vibrations are set up in the system resulting in the free to and fro motion of the mass (m_1) and (m_2), this motion is assisted

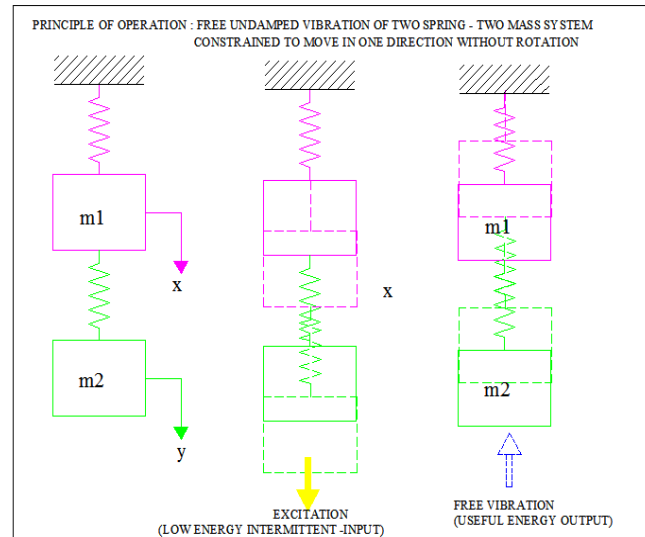


Fig.2 Mathematical model with two mass two spring system by gravity and will continue until resonance occurs that is the systems will continue to work long after the input (which is intermittent) has ceased hence the term free energy is used.

B. Problem statement

In an ordinary conventional flywheel the engines ignition-induced rotational speed irregularity causes torsional vibration in the vehicles driveline also the fluctuations in engines speed. At a given speed the ignition frequency is equal to the natural frequency of the driveline so that extremely high vibrations amplitudes occur that causes rattle in transmission. Also more mass of flywheel increases the cost of engine.

C. Methodology

In this study the two stroke petrol engine is used as a prime mover to run the test rig. In the planetary dual mass flywheel the torsional vibration damper is incorporated into the flywheel as a two arc spring and two masses on the conventional flywheel. For this purpose the flywheel is divided into a primary and a secondary mass hence the name exists "dual mass flywheel". Transmission rattle is rectified by DMF. Again by reducing the mass and keeping the Inertia factor same will be able to optimize the dual mass flywheel giving the better results than that of conventional flywheel that is power output and efficiency of engine.

D. Objectives of project

1. Development of mathematical model for optimization of flywheel mass to derive stipulated output power.
2. Design and development of inertia augmentation mechanism.
3. Design and development of optimized flywheel using inertia augmentation technique.
4. Test and trial on optimized flywheel using test rig.
5. Plot performance characteristic curves.

E. Scope

1. Lowered weight of flywheel system will reduce system weight thereby leading to better fuel economy of vehicle and also reduce overall material cost.
2. Compact size: The size of the flywheel will lead to better cabin space of vehicle.
3. Engine life increases due to balanced power output.

II. LITERATURE REVIEW

Bjorn Bolund, Hans Bernhoff, Mats Leijon *et al*^[1] studied the use of flywheel. Nowadays flywheels are complex construction where energy is stored mechanically and transferred to and from the flywheel by an integrated motor or generator. The wheel has been replaced by a steel or composite rotor and magnetic bearings have been introduced. By increasing the voltage, current losses are decreased and otherwise necessary transformer steps become redundant.

Guangming Zhao, Zhengfeng Jiang, Lei Chen ^[2] studied that they have offered an investigation of DMF-CPVAs setup for isolating torsional vibration from engine. The simplified mathematical model of DMF-CPVAs setup is built based on the linear theory, the performance of the setup is analyzed and the result shows that using CPVAs on the DMF leads to an advantage of isolation vibration instead of just damping vibrations at a specific frequency could dampen vibrations over a range of frequencies.

Jake Amoroso ^[3] studied that energy storage is becoming increasingly important with the advent of individual electronic devices and the rising need to accommodate a greater population, which relies on these devices. This author proposes the use of flywheel energy storage in conjunction with differential absorption as a method for generating clean long lasting energy. As will be discussed later, the introduction of a new glass 50 times stronger allows the development of this new energy source. Without entering into a large discussion on flywheel design and technical considerations or differential absorption a small amount of background information shall be presented to familiarize the reader with the general theory behind the concept.

Ulf Schaper, Oliver Sawodny, Tobias Mahl and Uti Blessing ^[4] they studied that Dual Mass Flywheel (DMF) is used as oscillations damper in automobile for prevent gearbox rattling. This mainly includes a model for the two arc springs in the DMF and their friction behavior. Both centrifugal effects and redirection forces act radially on the arc spring which induces friction. A numerical simulation of the DMF model is compared to measurements for model validation. Finally the observability of the engine torque using the DMF is discussed. For this purpose a linear torque observer is proposed and evaluated

III. THEORETICAL ANALYSIS OF CONVENTIONAL AND DUAL MASS FLYWHEEL

Effect of increased inertia of Dual mass flywheel

The effect of inertia augmentation can be seen by the difference in the fluctuation of energy in the Dual mass flywheel and the Conventional flywheel.

Since, Maximum fluctuation of energy of Conventional flywheel,

$$\Delta E_{cnv} = m R^2 \omega_{cnv}^2 C_s \tag{1}$$

Where, m = mass of flywheel = 1.9 kg

R= Mean Radius of rim = 68 mm =0.068

N1= Maximum average speed of conventional flywheel in rpm

N2= Minimum average speed of conventional flywheel in rpm

ω_{cnv} = mean angular speed of dual mass flywheel

$$\omega_{cnv} = \frac{2\pi(N1 + N2)}{2} \tag{2}$$

$$\therefore \omega_{cnv} = \frac{2\pi(1315 + 910)}{2}$$

$$\therefore \omega_{cnv} = 6990 \text{ rad/sec} \tag{i}$$

Coefficient of fluctuation of speed C_s ,

$$C_s = \frac{(N1 - N2)}{N} \tag{3}$$

Where,

$$N = \frac{(N1 + N2)}{2} = 1112 \tag{ii}$$

$$\therefore C_s = \frac{(1315 - 910)}{1112} = 0.364$$

(iii)

$$\Delta E_{cnv} = m R^2 \omega_{cnv}^2 C_s$$

$$\therefore \Delta E_{cnv} = 1.9 \times 0.068^2 \times 6990^2 \times 0.364$$

$$\therefore \Delta E_{cnv} = 156.25 \text{ KJ} \tag{iv}$$

Similarly,

Maximum fluctuation of energy of Dual mass flywheel,

$$\Delta E_{dmf} = m R^2 \omega_{dmf}^2 C_s$$

Where, m =mass of flywheel =1.9 kg

R= Mean Radius of rim = 68 mm =0.068

N1= Maximum average speed of dual mass flywheel in rpm

N2= Minimum average speed of dual mass flywheel in rpm

ω_{dmf} = mean angular speed of dual mass flywheel

$$\omega_{dmf} = \frac{2\pi(N1 + N2)}{2} \tag{2}$$

$$\therefore \omega_{dmf} = \frac{2\pi(1430 + 930)}{2}$$

$$\therefore \omega_{dmf} = 7414 \text{ rad/sec} \tag{v}$$

Coefficient of fluctuation of speed C_s ,

$$C_s = \frac{(N1 - N2)}{N} \tag{3}$$

Where,

$$N = \frac{(N1 + N2)}{2} = 1180 \tag{vi}$$

$$\therefore C_s = \frac{(1430 - 930)}{1180} = 0.423 \tag{vii}$$

$$\Delta E_{dmf} = m R^2 \omega_{dmf}^2 C_s$$

$$\therefore \Delta E_{dmf} = 1.9 \times 0.068^2 \times 7414^2 \times 0.423$$

$$\therefore \Delta E_{cnv} = 204.27 \text{ KJ} \tag{viii}$$

From equation (iv) and (viii) effectiveness of dual mass flywheel over conventional flywheel

$$\epsilon = \frac{\Delta E_{dmf}}{\Delta E_{cnv}} = \frac{204.27}{156.25} = 1.30 \tag{4}$$

Thus the Dual mass flywheel is 1.3 times effective than the Conventional flywheel.

A. Experimental analysis conventional flywheel

Engine Speed = 1300 rpm;

Engine Power = 205 watt

Table I Observation table for conventional flywheel

Sr. No	Loading		Unloading		Average Speed (rpm)
	Load (Kg)	Speed (rpm)	Load (Kg)	Speed (rpm)	
1	1.5	1310	1.5	1320	1315
2	2.0	1270	2.0	1280	1275
3	2.5	1240	2.5	1250	1245
4	3.0	1210	3.0	1200	1205
5	3.5	1180	3.5	1190	1185
6	4.0	1150	4.0	1160	1155
7	4.5	1010	4.5	1030	1020
8	5.0	900	5.0	920	910

Table II Result for Conventional flywheel

Sr. No.	Load (Kg)	Speed (rpm)	Torque (N-m)	Power (Watt)	Efficiency %
1	1.5	1315	0.470	64.858	31.63
2	2.0	1275	0.627	83.83	40.89
3	2.5	1245	0.784	102.33	49.92
4	3.0	1205	0.941	118.85	57.98
5	3.5	1185	1.098	136.36	66.52
6	4.0	1155	1.255	151.89	74.10
7	4.5	1020	1.412	150.90	73.62
8	5.0	910	1.569	149.59	72.98

Sample calculations:

a) *Output Torque* = $W \times 9.81 \times \text{Radius of dyno- brake pulley}$

$$\therefore T_{o/p} = 4 \times 9.81 \times 0.032 = 1.26 \text{ N-m}$$

(ix)

b) *Output Power* = $P_o / p = \frac{2\pi NT}{60}$ (5)

$$\therefore P_o / p = \frac{2\pi \times 1155 \times 1.26}{60} = 152.39 \text{ watt}$$

(x)

c) *Efficiency*(η) = $\frac{\text{Output power}}{\text{input power}} \times 100$ (6)

$$\text{Efficiency}(\eta) = \frac{152.39}{205} = 74.33\% \tag{xi}$$

B. Experimental analysis of dual mass flywheel

Engine Speed = 1300 rpm

Engine Power = 205 watt

Sample calculations:

d) *Output Torque* = $W \times 9.81 \times \text{Radius of dyno- brake pulley}$

$$\therefore T_{o/p} = 4 \times 9.81 \times 0.032 = 1.26 \text{ N-m}$$

(xii)

e) *Output Power* = $P_o / p = \frac{2\pi NT}{60}$

$$\therefore P_o / p = \frac{2\pi \times 1250 \times 1.26}{60} = 164.93 \text{ watt}$$

(xiii)

f) *Efficiency*(η) = $\frac{\text{Output power}}{\text{input power}} \times 100$

$$\text{Efficiency}(\eta) = \frac{164.93}{205} = 80.45\% \tag{ix}$$

Table III Observation table for dual mass flywheel

Sr. No	Loading		Unloading		Average Speed (rpm)
	Load (Kg)	Speed (rpm)	Load (Kg)	Speed (rpm)	
1	1.5	1430	1.5	1420	1425
2	2.0	1400	2.0	1390	1395
3	2.5	1370	2.5	1360	1365
4	3.0	1320	3.0	1310	1315
5	3.5	1280	3.5	1290	1285
6	4.0	1250	4.0	1240	1245
7	4.5	1210	4.5	1210	1210
8	5.0	1190	5.0	1180	1185

Table IV Result for dual mass flywheel

Sr. No.	Load (Kg)	Speed (rpm)	Torque (N-m)	Power (Watt)	Efficiency %
1	1.5	1425	0.47	70.27	34.28
2	2.0	1395	0.63	91.72	44.75
3	2.5	1365	0.78	112.1	54.73
4	3.0	1315	0.95	129.7	63.27
5	3.5	1285	1.10	147.8	72.13
6	4.0	1245	1.25	163.7	79.87
7	4.5	1080	1.41	159.7	77.95
8	5.0	930	1.57	152.8	74.58

C. Graphical representation

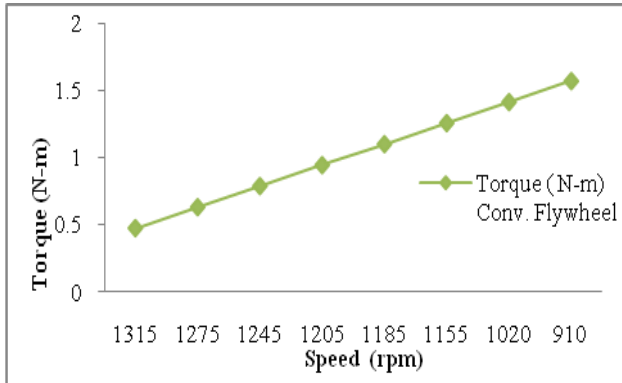


Fig. 3 Torque vs. speed for conventional flywheel

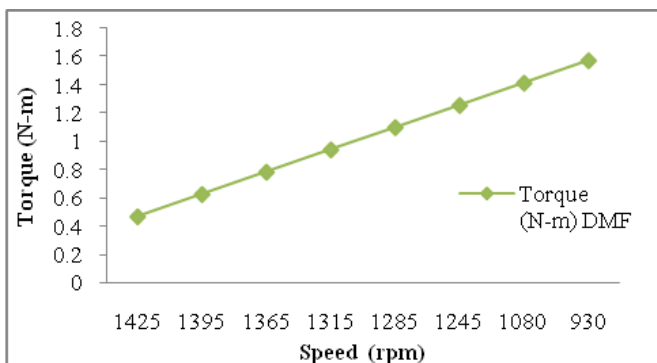


Fig. 4 Torque vs. speed for dual mass flywheel

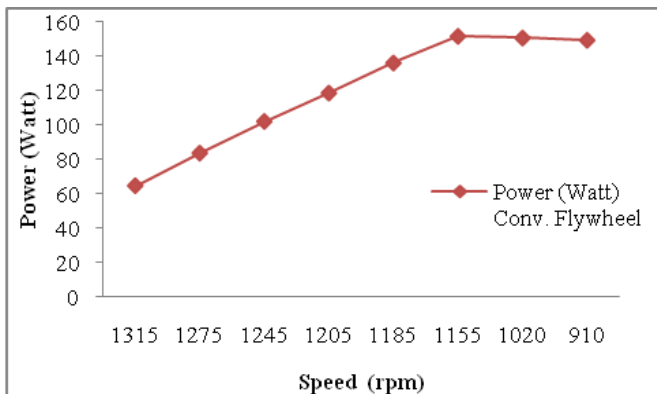


Fig. 5 Power vs. speed for conventional flywheel

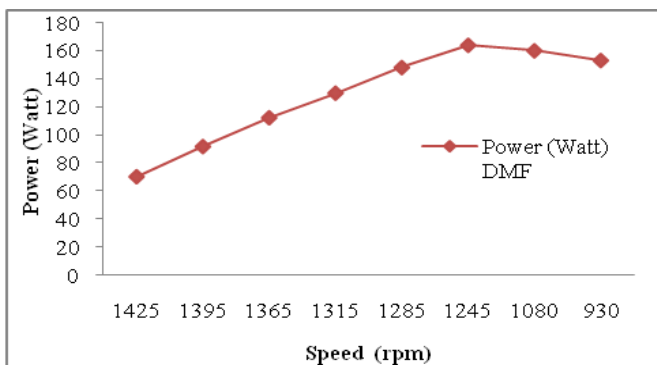


Fig.6 Power vs. speed for dual mass flywheel

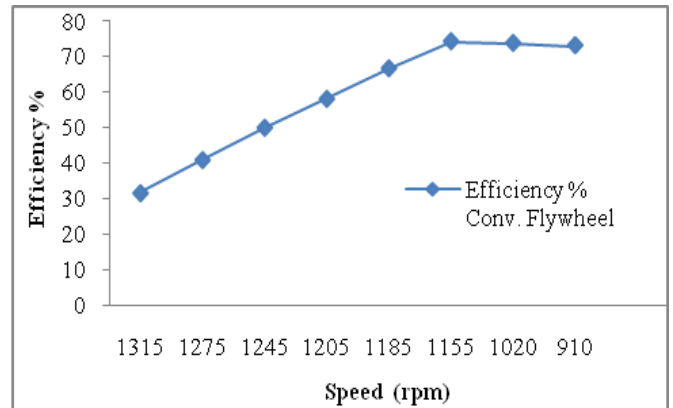


Fig. 7 Efficiency vs. speed for conventional flywheel

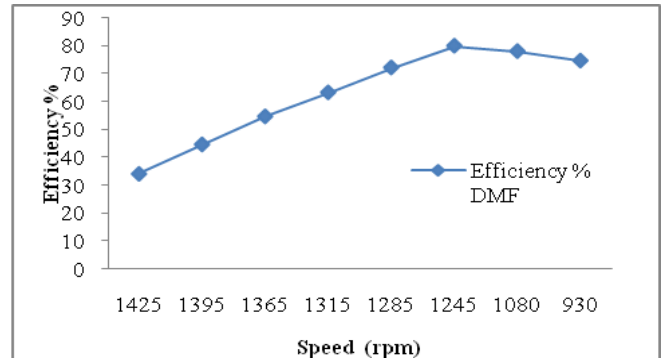


Fig. 9 Efficiency vs. speed for dual mass flywheel

D. Result and discussion

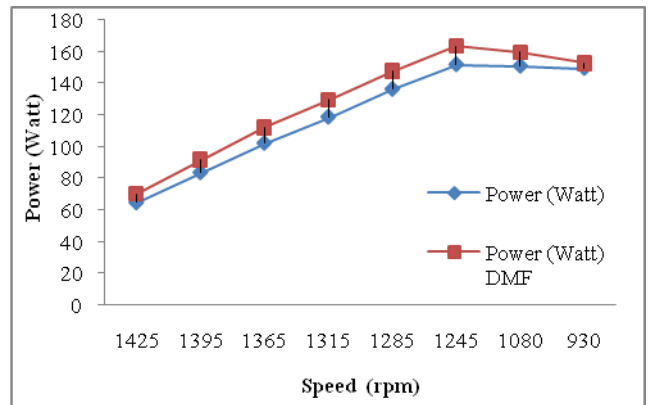


Fig. 9 Comparison of power output of conventional and dual mass flywheel

Fig. 9 shows that by using the Dual mass flywheel the power output is increased by 7 to 8 % approximately.

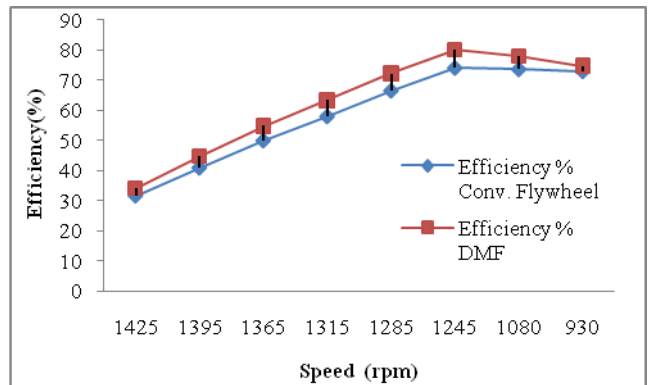


Fig. 10 Comparison of efficiency of conventional and dual mass flywheel

Fig. 10 shows that the Dual mass flywheel is 5 to 6 % efficient than the conventional flywheel which also result in increase in fuel economy of the engine.

IV. CONCLUSION

It is observed that there is approximately 7 to 8 % increase in power output by using the Dual mass flywheel and also observed that the Dual mass flywheel is 5 to 6 % efficient than the conventional flywheel which will also result in increasing fuel economy of the engine.

ACKNOWLEDGEMENT

I place on record and warmly acknowledge the continuous encouragement, invaluable supervision, timely suggestions and inspired guidance offered by our guide Prof. R.S. Shelke, Professor, Department of Mechanical Engineering Sir Visvesvaraya Institute of Technology, Chincholi, Nasik in bringing this report to a successful completion. I am grateful to Prof. Dr. S.N. Shelke, Head of the Department of Mechanical Engineering for permitting me to make use of the facilities available in the department to carry out the project successfully. Last but not the least I express my sincere thanks to all of my friends who have patiently extended all sorts of help for accomplishing this undertaking.

Finally I extend my gratefulness to one and all who are directly or indirectly involved in the successful completion of this work.

REFERENCES

1. Bjorn Bolund, Hans Bernhoff, Mats Leijon, "Flywheel energy and power storage systems", Renewable and Sustainable Energy Reviews 11 (2007) 235-258
2. Guangming Zhao, Zhengfeng Jiang, Lei Chen, "Linear Analysis for Performance of Dual Mass Flywheel with Centrifugal Pendulum Vibration Absorbers System" Teklanika, Vol. 11, No. 5, May 2013, pp. 2371- 2376
3. Jake Amoroso, "The Flywheel Energy Storage System (FESS)", New York State College of Ceramics
4. Ulf Schaper, Oliver Sawodny, Tobias Mahl and Uti Blessing, " Modeling and torque estimation of an automotive Dual Mass Flywheel", 2009 American Control Conference, Hyatt Regency Riverfront, St. Louis, MO, USA , Page -1207

AUTHOR PROFILE



Digambar G. Dighole completed BE (Mechanical Engineering) & appearing in ME Mechanical (Design Engineering) from Sir Visvesvaraya Institute of Technology, Nashik, Savitribai Phule Pune University abbreviated as Pune University.

Mo. No. 9921146501

Prof. R.S. Shelke, ME Mechanical, Professor of Mechanical Engineering, Sir Visvesvaraya Institute of Technology, Nashik, Savitribai Phule Pune University abbreviated as Pune University

Dr. S. N. Shelke, ME, PhD, Head of department of Mechanical Engineering, Sir Visvesvaraya Institute of Technology, Nashik, Savitribai Phule Pune University abbreviated as Pune University