

A Novel Approach for Mosaic Image Transmission using Various Transforms

Ramya. N and D. Rahul

Abstract—A novel approach to transmit images in a secure manner is proposed, in which the secret image is transformed into a same sized meaningful mosaic image. The obtained mosaic image, which is identical to the cover image and used as disguise of secret image, is obtained by segmenting the secret image into tiles and their color characteristics are transformed to that of the cover image blocks. Noise may affect the mosaic image while transmitting it to receiver in free space. In this article, we propose a skillful approach where the external noise is suppressed using various effective transformation techniques. The secret image recovery is based on the information embedded in the transmitted mosaic image using different data hiding approaches. The proposed algorithm achieves effective de-noising and de-mosaicing in terms of peak signal to noise ratio (PSNR), root mean square error (RMSE) and visual quality at low computational cost.

Index Terms—Mosaic image, color transformations, de-noising, de-mosaicing and transformation techniques.

I. INTRODUCTION

IN recent years, with the evolution of computer and Internet technology, images are widely used to convey information. The wide usage of images in various applications includes medical systems, confidential military archives, enterprises and storage systems. Security is the major issue while transmitting images through internet where hacking of confidential data may take place. Transfer of images from one place to another may contaminate the image information, so new methodology is derived to eliminate noise and to recover the secret image nearly losslessly.

Recently, many approaches came into existence for secure image transmission [1] where noise factor is not taken into account and applied only on RGB images. So, a new algorithm is designed to reduce the amount of noise content in the mosaic image and extended to another color model which is named as YUV. In this approach, various noises are added to the mosaic image at the channel such as salt & pepper noise, speckle noise and additive white Gaussian noise

(AWGN) where real time images are mostly affected by AWGN. Different transformation techniques are implemented to reduce the noise effects which include discrete wavelet transform (DWT), discrete curvelet transform (DCT) and Stockwell transform (S-Transform).

The proposed technique takes RGB images as input and converts them into YUV color model, on which the whole operation is performed. The secret image, which is to be transmitted to the receiver, and cover images are segmented into tiles and blocks respectively of same size. The secret tiles are fitted into cover blocks and color transformations are applied on tile images such that they look similar to the cover blocks. The color transformed values are Huffman encoded and stored in Huffman table which is inserted into the resultant image to form a mosaic image. It looks same as the cover image there by reducing the hackers attention during transmission. While transmission, the mosaic image may be corrupted with noise and the noisy mosaic image is transferred as the input to the receiver.

The color transformed values are Huffman decoded and tiles are extracted to recover noisy secret image from the noisy mosaic image. The amount of noise which is present in noisy secret image is reduced by using various transforms like wavelet, curvelet and S-Transforms to retrieve the YUV secret image, which in turn converted into RGB color model.

II. DESIGN METHODOLOGY

The proposed technique involves three phases which includes 1) Generation of mosaic image 2) Noisy mosaic image creation and 3) Retrieval of secret image. The flow diagram of transmission and reception of mosaic image is shown in the Fig. 1.

The mosaic image is yielded as output in the first phase, which involves color transformed secret image tiles based on similarity criterion of the cover image blocks. It consists of five stages: 1) Transforming secret and cover images into YUV color model 2) Fragmentation of secret and cover images into tiles and blocks respectively 3) Converting the each tile in secret image to be that of the respective block in cover image through color transformations 4) Fitting the tile image into cover blocks 5) Performing Huffman encoding on the information needed for the secret image retrieval and is embedded to form a mosaic image.

Ramya. N, Dept. of ECE, DVR & Dr. HS MIC college of Engineering and Technology Kanchikacherla, Andhra Pradesh, India.

D. Rahul, Assistant Professor, Dept. of ECE, DVR & Dr. HS MIC college of Engineering and Technology Kanchikacherla, Andhra Pradesh, India.

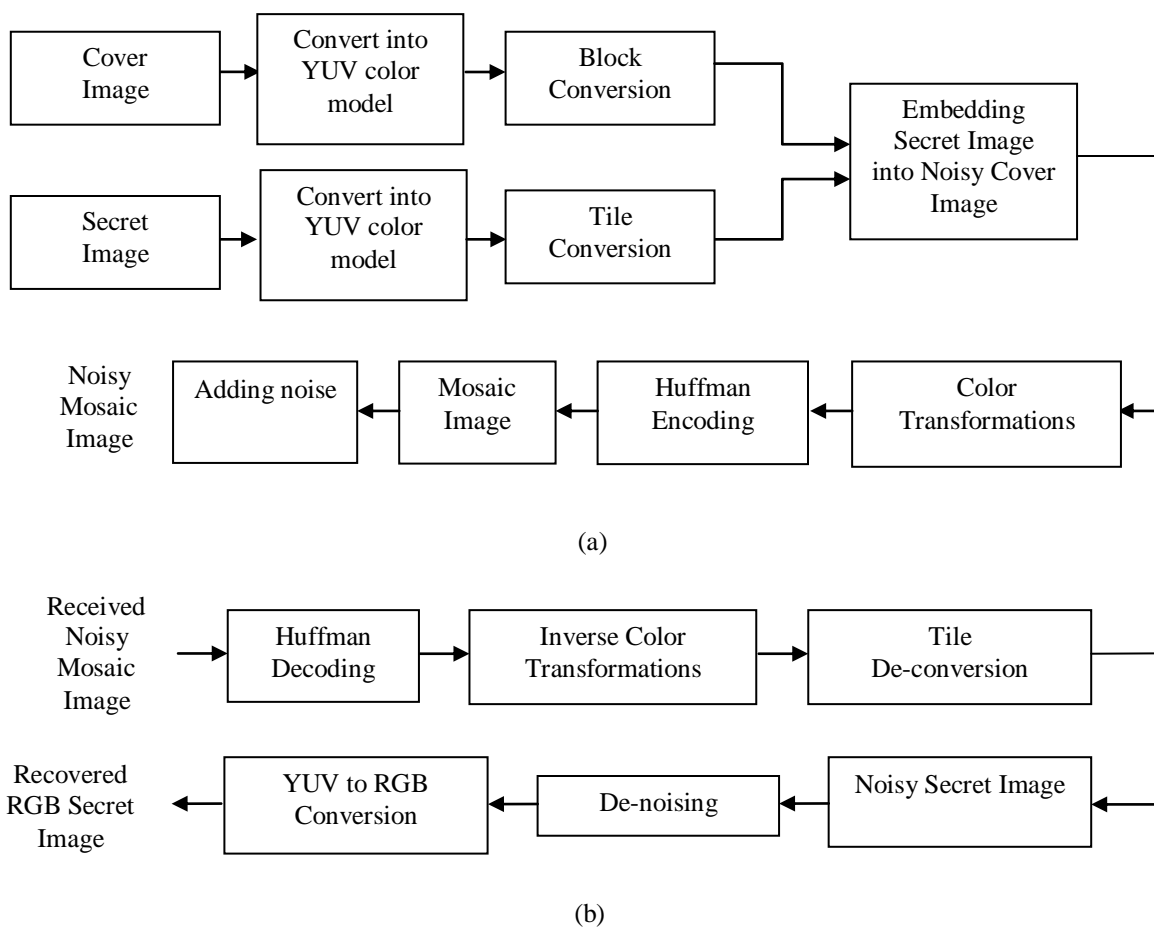


Fig. 1. Flow diagram of proposed technique: (a) Transmission of mosaic image. (b) Retrieval of secret image.

The second phase includes addition of various noises to the mosaic image resulting in noisy mosaic image. In the third phase, five stages are included: 1) Obtaining the tile information from the noisy mosaic image and performing Huffman decoding 2) Extracting the secret tiles by applying inverse color transformations to form noisy secret image 3) De-noising the noisy secret image using different transform techniques such as wavelets, curvelets and S-Transform and 4) Conversion of YUV to RGB color model.

A. Mosaic image generation

In the first phase of this novel technique, initially we convert both the secret and cover images into YUV color model [2], taking RGB images as reference in this context of same size. The secret and cover images are divided into tiles and blocks of equal size and each tile is color transformed to the corresponding cover block [3]. The Huffman encoding, an optimized compression technique, is used to store the color transformed values in Huffman table, which is used for recovery of secret tiles.

Every tile of the secret image is embedded into respective target block along with the Huffman table to form mosaic image using least significant bit (LSB) substitution data-hiding

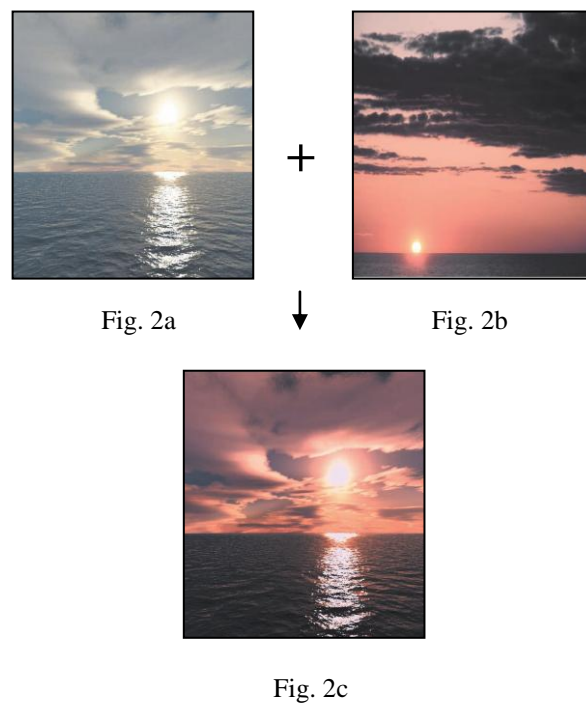


Fig. 2. Color processed image

approach [4]. Fig. 2 and Fig. 3 show an example of how color transfer scheme is applied on images and the mosaic image creation respectively.

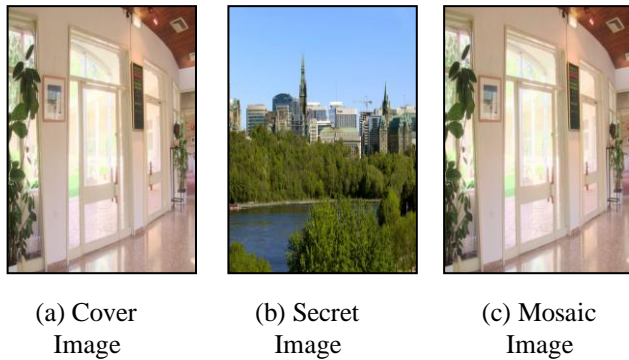


Fig. 3. Mosaic image creation

B. Noisy mosaic image construction

Any information that is transmitted from sender to receiver may be corrupted with noise present in the channel. So, noise is taken as the major aspect in this article. The obtained mosaic image thus transmitted is contaminated with various noises, which include salt & pepper noise [5]-[7] speckle noise [8]-[11] and AWGN resulting in a noisy mosaic image.

C. Retrieval of secret image

The first step in the retrieval of secret image is to obtain secret tile information from the noisy mosaic image which involves restoring the color transformed values using reversible contrast mapping and that are stored in Huffman table at the transmitter end. The noisy secret image is built by combining the secret tiles. To suppress the noises like salt & pepper noise, speckle noise and AWGN, which is added at the medium, we follow the de-noising process. Numerous transform techniques are used for noise reduction which includes DWT [12]-[14], DCT [15]-[16] and S-Transform [17]-[19] to obtain the de-noised secret image. Real time images are mostly available in RGB color model; therefore we convert the obtained YUV secret image into RGB model.

III. ALGORITHM

Algorithm: Secure image transmission using various transforms

Input: a secret image SI , a cover image CI

Output: recovered secret image RSI .

Steps:

- Translate the SI and CI into YUV color model and are denoted as SI_y and CI_y .
- Checking whether the CI_y size is greater than that of SI_y . if not resize the CI_y .
- Partitioning the SI_y into k tiles $\{ST_1, ST_2, \dots, ST_k\}$ and CI_y into k blocks $\{CB_1, CB_2, \dots, CB_k\}$.
- Mapping of each tile in $SI_y = \{ST_1, ST_2, \dots, ST_k\}$ to the each block in $CI_y = \{CB_1, CB_2, \dots, CB_k\}$ in a sequence

of the form: $ST_1 \rightarrow CB_1, ST_2 \rightarrow CB_2, \dots, ST_k \rightarrow CB_k$.

- Embedding tile images into the respective blocks of CI_y .
- Applying color transformations on each tile image so that it is analogous to cover image block.
- For every pixel value p_{yi} in each tile image with color value c_{yi} where $c_{yi} = y, u$ and v into a new value c''_{yi} . If the p_{yi} is larger than the largest value or smaller than the smallest value then it is rounded off to largest and smallest value respectively. For example, if (a, b) are original pixel values then the transformed pixel values are obtained by using (1).

$$\left. \begin{aligned} a' &= 2a - b \\ b' &= 2b - a \end{aligned} \right\} \quad (1)$$

- Mosaic image MI_y is created by embedding Huffman encoded color transformed values which are stored in Huffman table.
- Various noises are added to mosaic image in the medium resulting in noisy mosaic image NMI_y .
- Restore the color transformed values from the NMI_y using Huffman decoding. The original pixel values are obtained from the transformed pixel values using (2).

$$\left. \begin{aligned} a &= \frac{2}{3}a' + \frac{1}{3}b' \\ b &= \frac{1}{3}a' + \frac{2}{3}b' \end{aligned} \right\} \quad (2)$$

- The tile images are retrieved in a raster scan order to form the noisy secret image NSI_y .
 - Perform noise reduction to NSI_y using several transform techniques to create a de-noised secret image SI_y .
 - Transpose the DSI_y into RGB color model to obtain the desired secret image SI as output.
-

IV. DESIGN FLOW

The design flow diagrams for transmission of mosaic image and retrieval of secret image are shown in Fig. 4. and Fig. 5. The transmission process starts with a selection of cover image, which is duplicate image used for transmission of secret image and the secret image is the original image i.e. to be transmitted to the receiver. Size constraints are the major aspect in both images. Both the images are converted into YUV color model and are split into secret tiles and cover blocks. Inserting each secret tile into every block of cover image, color transformations are performed on tiles to form the mosaic image.

The mosaic image, which looks similar to that of cover image, is corrupted with noise in free space. The noises may be of salt & pepper, speckle and AWGN resulting in noisy mosaic image. The receiver receives the noisy mosaic image as input, where the inverse color transformations are applied and tile images are differentiated from the mosaic image. The tiles are merged together to form the noisy mosaic image. The amount of noise which is present in noisy secret image is suppressed by using numerous transforms. The performance of the technique is estimated by using metrics and these are

compared for various noises using different transforms.

Transmitter

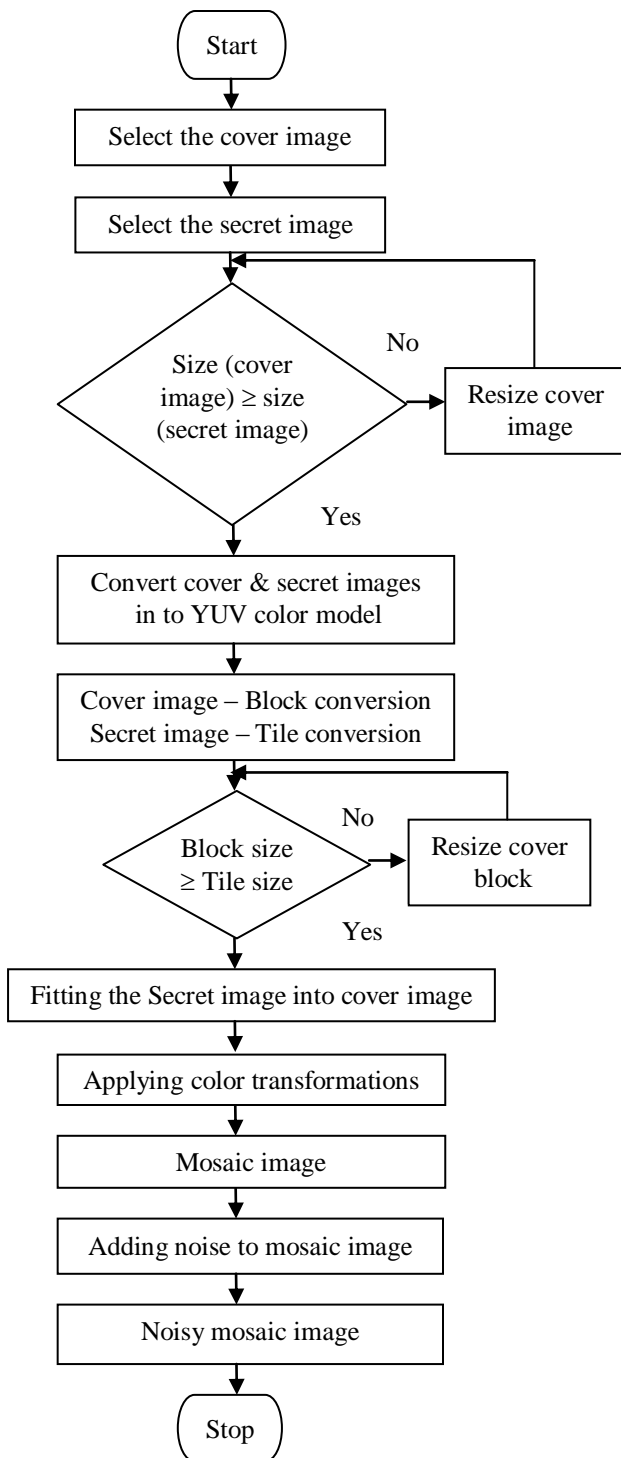


Fig. 4. Design flow for transmission of mosaic image

Receiver

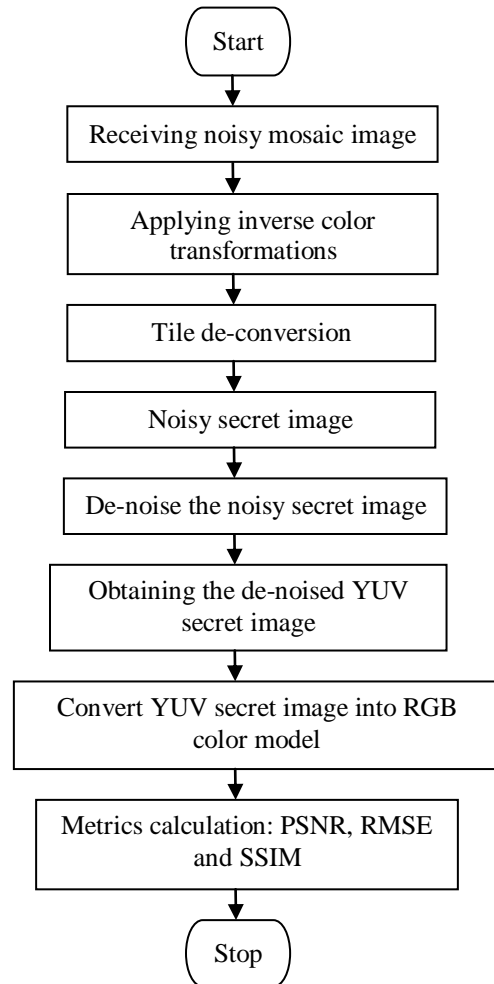


Fig. 5. Design flow for recovery of secret image

V. RESULTS SUMMARY

In this section, the performance of the proposed technique is estimated. The secret image is recovered in a very secure manner by using proposed method and compared with existing technique i.e. secure image transmission without considering noise factor. To measure the efficiency of our technique, RMSE, PSNR and SSIM are calculated. We choose a set of images to check the performance of the proposed method.

In Table I, the RMSE, PSNR and SSIM [20]-[22] values for various noises using different transforms are shown for a set of images. The best value of each metric for AWGN is italicized, which is resulted by using S-Transforms. The proposed technique is always better choice for the secure image transmission which shows the feasibility of the algorithm. We have shown the simulated results for a set of images compared with the secure image transmission technique without noise concern in Fig. 6 and Fig. 7. We can visualize from our results that noise is attenuated and secret image is recovered effectively. The main program is executed in a fraction of 2 min on a 1.8 GHz Intel® Core™ i5 processor based minicomputer even for large sized images.

Transmitter

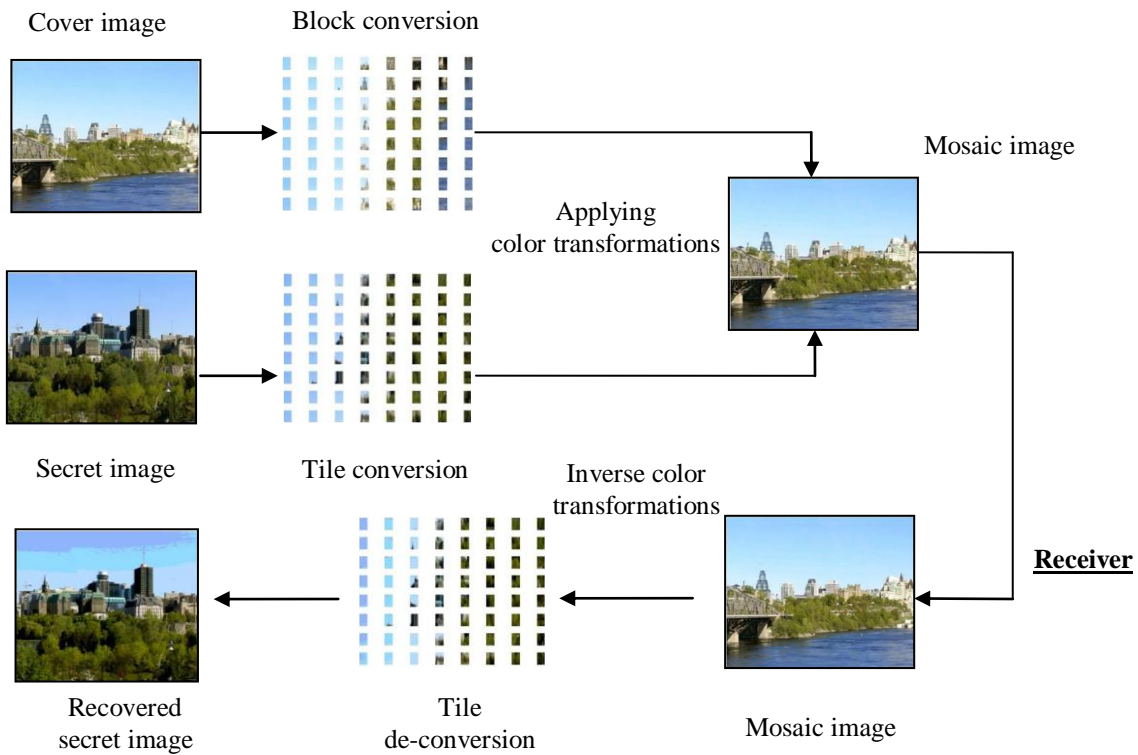


Fig. 6. Secure image transmission for set of images without introducing noise factor

Transmitter

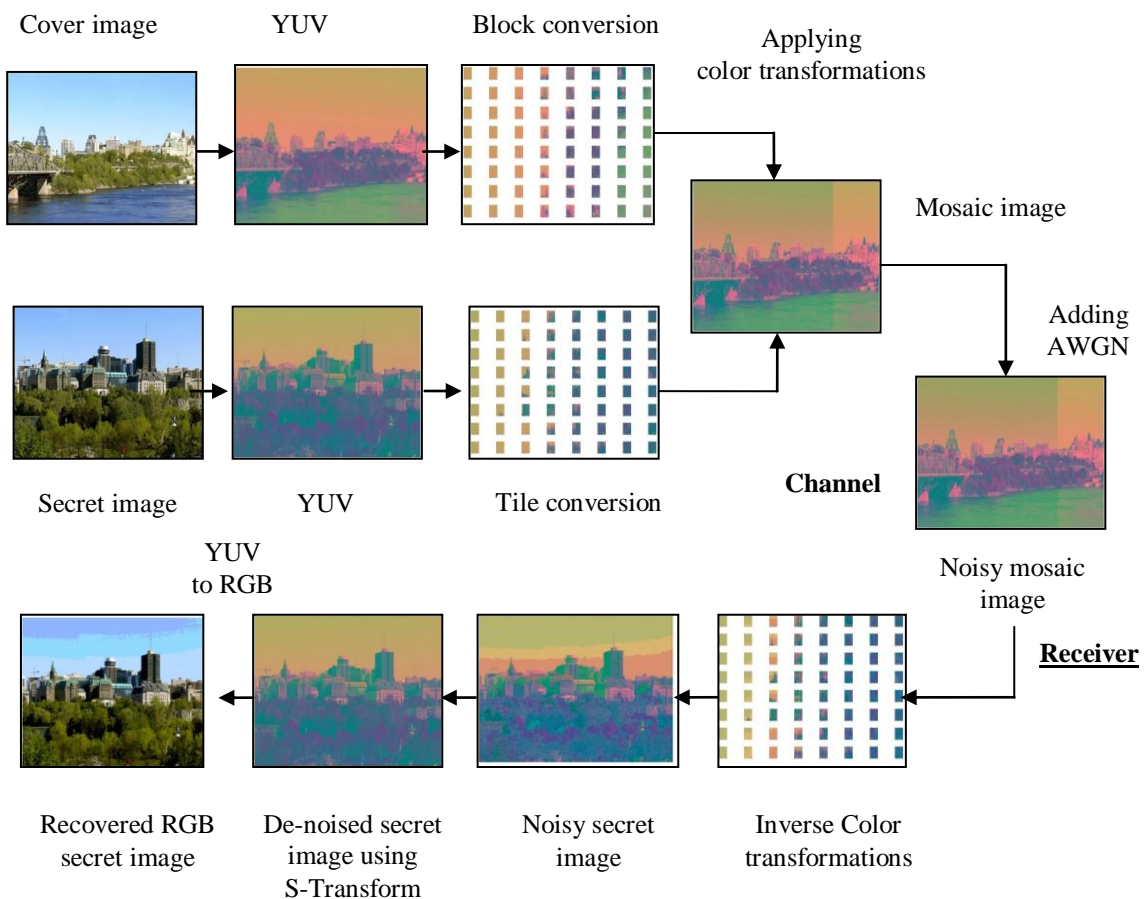


Fig. 7. Secure image transmission for set of images considering AWGN and S-Transform for de-noising

TABLE I
Comparison of metrics for set of images for various noises using different transforms

Metric	Secure image transmission	Secure image transmission through Wavelet transform			Secure image transmission through Curvelet transform			Secure image transmission through S-Transform		
		N_{sp}	N_s	N_g	N_{sp}	N_s	N_g	N_{sp}	N_s	N_g
RMSE	6.00	2.80	3.56	3.44	2.75	3.33	3.16	0.64	3.06	2.68
PSNR(dB)	32.58	39.16	37.10	37.40	39.75	37.71	38.29	51.94	38.42	39.57
SSIM	0.78	0.66	0.64	0.61	0.68	0.72	0.62	0.71	0.75	0.88

VI. CONCLUSION

The proposed technique is a novel approach of secure image transmission for creation of mosaic image in a meaningful manner and the confidential information can be transmitted in a secure way. The proper usage of pixel based color transformations provides mosaic image which is alike to the selected cover image without the need of cover image data base. The amount of noise, which is added at the medium, is suppressed to the maximum extent by using various transform techniques effectively. Various metrics are calculated and compared with numerous noises and several transforms. We can deduce that S-Transform gives better experimental results for various noises among other transforms. This work can be extended to other color models using various noises and advanced transform techniques.

ACKNOWLEDGEMENT

The authors express deep sense of thanks and gratitude to the Head of the Department, the supervisor, management and staff of MIC College of Technology for their inspiration and necessary technical suggestions during the research pursuit.

REFERENCES

- [1] Ya-Lin Lee, Student Member, IEEE, and Wen-Hsiang Tsai, Senior Member, IEEE "A New Secure Image Transmission Technique via Secret-Fragment-Visible Mosaic Images by Nearly Reversible Color Transformations", *IEEE Transactions On Circuits Ad Systems For Video Technology*, Vol. 24, no. 4, Apr. 2014.
- [2] Che-Yen Wen and Chun-Ming Chou, "Color Image Models and its Applications to Document Examination", *Forensic Science Journal*, Jan. 03,2004.
- [3] E. Reinhard, M. Ashikhmm, B. Gooch and P. Shirley, "Color transform between images", *IEEE Comput. Graph. Appl.*, Vol. 21, no. 5,pp. 34-41, Sep-Oct. 2001.
- [4] R. Z. Wang, C. F. Lin, "Image Hiding by optimal LSB substitution and genetic algorithm", *Pattern Recog.*, Vol. 34, no. 3, pp. 671-683, 2001.
- [5] Nisha and Dr. Ravinder khanna, Dean R&D, Professor, "A Review of Image Restoration Techniques for Salt-and-Pepper noise with Test Results", *International Journal of Advanced Research in Electronics and Communication Engineering (IJARECE)*, Vol. 4, Issue 2, Feb. 2015.
- [6] Madhu S. Nair, K. Revathi and Rao Tatavarti, "Removal of Salt-and Pepper Noise in Images: A New Decision-Based Algorithm", *International Multiconference of Engineers and Computer Scientists (IMECS)*, Vol. 1, 19-21 Mar. 2008.
- [7] Raymond H. Chan, Chung-Wa Ho and Mila Nikolova, " Salt-and-Pepper Noise Removal by Median-Type Noise Detectors and Detail-Preserving Regularization", *IEEE Transctons on Image Processing*, Vol. 14, no. 10, Oct. 2005.
- [8] K. Bala Prakash, R. Venu Babu and B. Venu Gopal, "Image Independent Filter for Removal of Speckle Noise", *International Journal of Computer Science Issues (IJCSI)*, Vol. 8, Issue 5, no. 3, Sep. 2011.
- [9] Arpit Singhal and Mandeep Singh, " Speckle Noise Removal and Edge Detection Using Mathematical Morphology", *International Journal of Soft Computing and Engineering (IJSCE)*, ISSN: 2231-2307, Vol. 1, Issue 5, Nov. 2011.
- [10] K. M. Sharavana Raju, Mohammed Shah Nawaz Nasir and T. Meera Devi, " Filtering Techniques to reduce Speckle Noise and Image Quality Enhancement methods on Satellite Images ", *IOSR Journal of Computer Engineering (IOSR-JCE)*, ISSN: 2278-8727, Vol. 15, pp. 10-15, Issue 4, Nov. – Dec. 2013.
- [11] Er. Ravi Garg and Er. Abhijeet Kumar, " Comparison of Various Noise Removals Using Bayesian Framework", *International Journal of Modern Engineering Research (IJMER)*, ISSN: 2249-6645, Vol. 2, pp. 265-270, Issue 1, Jan. –Feb. 2012.
- [12] Dipalee Gupta and Siddhartha Choubey, " Discrete Wavelet Transform for Image Processing", *International Journal of Emerging Technology and advanced Engineering (IJETA)*, ISSN: 2250-2259, Vol. 4, Issue 3, Mar. 2015.
- [13] Teena Varma, Vidya Chitre and Dipti Patil, " The Haar Wavelet and The Bi-orthogonal Wavelet Transforms of an Image", *International Journal of Engineering Research and Applications (IJERA)*, ISSN: 2248-9622, 30 Mar. 2012.
- [14] Rajesh Kumar Rai and Trimbak R. Sontakke, " Implementation of Image Denoising using Thresholding Techniques", *International Journal of Computer Technology and Electronics Engineering (IJCTEE)*, ISSN: 2249-6343, Vol. 1, Issue 2.
- [15] Jean-Luc Starck, Emmanuel J. Candes and David L. Donoho, " The Curvelet Transform for Image Denoising ", *IEEE Transactions on Image Processing*, Vol. 11, no. 6, Jun. 2002.
- [16] Anil A Patil and Jyoti Singhai, " Image Denoising Using Curvelet Transform: An Approach for Edge Preservation", *Journal of Scientific & Industrial Research*, Vol. 69, pp. 34-38, Jan. 2010.
- [17] Yanhua WU and Qingli MA, " Study on Improved Discrete S-Transform", *Journal of Pattern Recognition & Image Processing* 4:4 (2013) 455-465.
- [18] Yusong Yan, Hongmei Zhu, "The Generalization of Discrete Stockwell Transforms", *19th European Signal Processing Conference (EUSIPCO 2011)*, Barcelona, Spain, Aug. 29-Sep. 2, 2011.
- [19] Lin Yun, Xu Xiaochun, Li Bin and Pang Jinfeng, "Time-Frequency Analysis Based on S-Transform", *International Journal of Signal*

Processing, Image Processing and Pattern Recognition, Vol. 6, no. 5, pp. 245-254.

- [20] Yusra A. Y. Al-Najir and Dr. Der Chen Soong, " Comparison of Image Quality Assessment: PSNR, HVS, SSIm, UIQI," *International Journal of Scientific & Engineering*, Vol. 3, Issue 8, pp. 2229-5518, Aug. 2012.
- [21] C. Sasl varnan, A. Jagan, Jaspreet Kaur, Divya Jyoti and Dr. D. S. Rao, "Image Quality Assessment Techniques on Spatial Domain," *International Journal of Computer Science and Technology*, Vol. 2, Issue 3, pp. 0976-8491, Sep. 2011.
- [22] Z. Wang, A. C. Bovik, H. R. Sheikh and E. P. Simoncelli, "Image Qaulity Assessment: From Error Visibilty to structural similarity," *IEEE Transcations on Image Processing*, Vol. 13, no. 4, pp. 600-612, Apr. 2004.
- [23] Stallings, William, 2007. "Data and Computer Communications", 8th Edition, Upper Saddle River, N. J. : Pearson/Prentice Hall.
- [24] R. C. Gonzalez and R. E. Woods, "Digital Image Processing," 2nd edition, Prentice-Hall, Inc. 2002, ISBN: 0-201-18075-8.
- [25] Rafael C. Gonzalez, Richard E. Woods and Steven L. Eddins, "Digital Image Processing Using MATLAB", Pearson Education, Inc. 2004, ISBN 0-13-008519-7.



Mr. D. Rahul was working as an Assistant professor in DVR & Dr. HS MIC College of Technology, Kanchikacherla, Krishna District. He received his Bachelor's Degree in (ECE) Jawaharlal Nehru Technological University (JNTU) Hyderabad, India in 2008 and Master's Degree from Alpen-Adria Klagenfurt University, Klagenfurt, Austria in 2011. Since 2011 he is working as faculty member in different Engineering Colleges in AP and he has 5 years of Experience and he is doing research work in Image and Video Processing. His fields of interest are Signal Processing, Image & Video Processing, Communication Networks, Digital electronics etc.



Ramya. N was born in Andhra Pradesh, India in 1992. She received the B.Tech. and M.Tech. degrees in Electronics and Communication Engineering (ECE) and Digital Electronics and Communication Engineering (DECE) from MIC College of Technology in 2013 and 2015 respectively. Her research interests include communications, image processing, video processing and signal processing.