

# Unsupervised MRI Brain Tumor Detection Techniques with Morphological Operations

Ritu Verma, Sujeet Tiwari, Naazish Rahim

*Abstract— Tumor is a deformity in human body cells which, if not detected and treated, can even lead to damage of body part. Brain tumor is one such deformity which has been located by pathologists manually from past few years. Magnetic Resonance Imaging (MRI), Computed Tomography (CT), Positron Emission Tomography (PET) and ultra sound are techniques which used to take images of brain cells. But MRI is widely used as it is multiplanar image capturing technique. It has always been a challenging task for automatically locating tumor and computing its dimensional parameter because boundaries or edges of different tissues in MRI brain images are unclear. Even intensities of light and dark intensity pixels are inseparable in maximum cases.*

*For brain tumor detection, clustering techniques are widely used. There is a vast variety of imaging tools such as in which the segmentation can be utilized. So in this work, K-Means clustering and Fuzzy C-Means Clustering techniques are implemented. Also one more technique which is Histogram Thresholding is implemented. Results of all these three unsupervised techniques are implemented over a collection of brain images which are gathered from open sources. Results of tumor location of these brain images are compared for three techniques and it is found that Fuzzy C-Means clustering outperforms other two techniques.*

**Index Terms— FCM, K-Means Clustering, Histogram Thresholding and Mathematical Morphology**

## I. INTRODUCTION

Brain is special organ of body which controls memory and learning, senses and emotion. It also controls other parts of the body, including muscles, organs, and blood vessels. Brain tumors are diseases in which cancer cells begin to grow in the tissues of the Brain. Brain tumors are unusual masses in or on the brain which can be due to result of uncontrolled cell growth and failure cell death in a normal manner. Tumors are broadly classified into primary and secondary tumor. Primary tumors are more like brain cells. Central nervous system tumors include heterogeneous diseases that may be benign, slow-growing injury to malignancies which may even cause death. However a malignant tumor grows very fast and affects large tissues. Secondary tumors have origin somewhere else in the body which then spread in brain. They are cancer cells actually that have spread into the brain. They can be diagnosed and may be removed easily by surgery.

Image segmentation is performed to detect any desired region which may be any object or some figure in the MRI

image, which can be used for recognition, editing or image compression etc. In machine learning techniques, where computer is used to segment desired part of an image from its background, there can be broadly two types of algorithm. These are unsupervised and supervised algorithms. Unsupervised Algorithms are such algorithms where no information is previously available to generate membership function of any class in image. Such unsupervised learning can be implemented by methods like clustering (e.g., k-means, fuzzy c-means clustering and hierarchical clustering) and neural network models. Supervised algorithm is task of deducing a function from training data. Such training data are input images and a desired output.

## II. LITERATURE SURVEY

In this section various latest techniques for Brain Tumor Detection techniques are studied.

**Ed-Edily et. al.** proposed brain tumor detection and localization framework which comprises five steps: image acquisition, pre-processing under a median filter, edge detection by sobel edge detection, modified histogram clustering to color threshold and morphological operations.

**Selkar et. al.** presented the detection and segmentation of brain tumor using watershed and thresholding algorithm.

**Sivaramakrishnan et. al.** proposed Fuzzy C-means clustering and histogram. The Fuzzy C-means clustering algorithm finds the centroids of the cluster groups.

**Dhanalakshmi et. al.** described k-means clustering algorithm for detecting the range and shape of tumor in brain MR Images.

**Ali et. al.** preprocessed T2 weighted modality, by bilateral filter to reduce the noise and maintaining edges among the different tissues. Gray level stretching and Sobel edge detection, K-Means Clustering technique based on location and intensity, Fuzzy C-Means Clustering, and An Adapted K-Means clustering technique and Fuzzy C-Means technique are applied.

**Kowar et. al.** presented detection of tumor in brain using segmentation and histogram thresholding.

**Selvakumar et. al.** implemented method which allows the segmentation of tumor tissue with accuracy and reproducibility comparable to manual segmentation. The

stage of the tumor is displayed based on the amount of area calculated from the cluster.

On the basis of problems analyzed after literature review, objectives of this research work are being defined here:

- i). Implementation of Unsupervised Brain Tumor Segmentation techniques like Histogram Thresholding, K-Means Clustering technique and Fuzzy C-Means clustering Technique.
- ii). Applying Morphological Operations to sharpen boundary of segmented tumor portion of image.

### III. METHODOLOGY

In this section, algorithms of three different unsupervised image segmentation techniques are being proposed to detect brain tumor.

**Histogram thresholding technique-** In this technique histograms of two halves of brain images are plotted. Then symmetry between these two histograms is observed then there would be every chance of presence of any deformity or tumor in the brain image.

Step by step explanation of method is given as below:

- i). Preprocessing- RGB color image is first converted into gray color image
- ii). Division the image- Gray image is then divided into two equal halves along its central axis. The column value is divided by 2. Divided images are halves of the original image.
- iii). Plotting and Comparing histogram of two halves- A histogram is a plot between pixel and its intensity. Histograms of two halves brain images are compared to estimate the tumor.
- iv). Selecting a threshold point- Resultant difference is selected as threshold point.
- v). Segmentation using threshold point- Intensity of image is compared with above calculated threshold point. If value is greater than the threshold, then its location is assigned a value 255 otherwise 0.
- vi). Tumor Selection- The highest intensity pixel location is selected as tumor.

**K-means clustering technique-** K-Means Clustering works on the principle of clustering of each pixel according to its minimum distance with any cluster.

Step by step explanation of method is given as below:

- 1. Assign the numbers of cluster value as  $k$ .
- 2. Randomly choose the  $k$  cluster centers,

- 3. Calculate mean or center of the cluster, such that cluster can be represented by  $C_a$  where  $p=(1, 2, 3, \dots, k)$

- 4. Calculate the distance b/w each pixel to each cluster center. It can be performed by nearest neighbor classification technique such as Euclidean Distance Calculation

$$d_{i,j} = \| X_{i,j} - C_a \| \quad (1)$$

- 5. If the distance is near to the center then move to that cluster. Otherwise move to next cluster.

- 6. Re-estimate the center.

- 7. Repeat the process until centroid movement stops.

**Fuzzy c-means clustering technique-** The fuzzy clustering algorithm is an iterative clustering method which can produce an optimal  $c$  partition by minimizing the weighted within group sum of squared error objective function  $J$

$$J_m = \sum_{i=1}^N \sum_{j=1}^C M_{ij}^m \| x_i - c_j \|^2 \quad (2)$$

where  $m > 1$ ,  $M_{ij}$  is membership degree of  $x_i$  in the cluster  $j$ ,  $x_i$  is any  $d$  dimensional data,  $c_j$  is cluster centre such that  $c_i = \{c_{i1}, c_{i2}, c_{i3}, \dots, c_{in}\}$ ,  $c$  is the number of clusters in  $x$  with limit  $2 \leq c < n$ ,  $m$  is a weighting exponent on each fuzzy membership. Cluster centre  $C = \{c_j\}$  can be computed by

$$c_j = \frac{\sum_{i=1}^N M_{ij}^m \cdot x_i}{\sum_{i=1}^N M_{ij}^m} \quad (3)$$

And membership matrix  $M^{(k)}$  and  $M^{(k+1)}$  can be calculated by

$$M_{ij}^m = \frac{1}{\sum_{k=1}^c \left( \frac{\| x_i - c_j \|^2}{\| x_i - c_k \|^2} \right)^{\frac{2}{m-1}}} \quad (4)$$

where  $1 \leq k \leq N$  and  $1 \leq i \leq C$

if  $\{ |M_{ij}^{(k+1)} - M_{ij}^{(k)}| \} < \epsilon$  then iteration is stopped otherwise set  $M^{(k+1)} = M^{(k)}$  and  $C$  is again calculated.

### IV. EXPERIMENTAL RESULTS

Results of each algorithm are shown step by step and then tumor results of these algorithms are compared.

#### A. HISTOGRAM THRESHOLDING TECHNIQUE

- 1. Dividing Image – Gray Scale Resized image is now partitioned into two equal halves. This will be a vertical partition, with same amount of brain region in both halves.

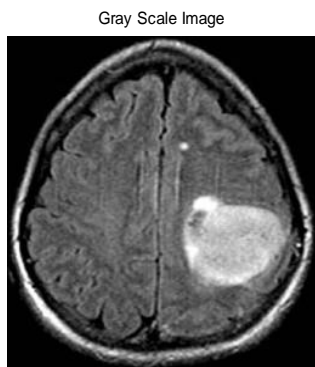


Figure 1 Resized Gray Scale Image




Figure 2 Partitioned Image in two halves (a) Left half, (b) Right Half

2. Histogram Difference- Now Fig. 3 showing difference between thresholds which are calculated

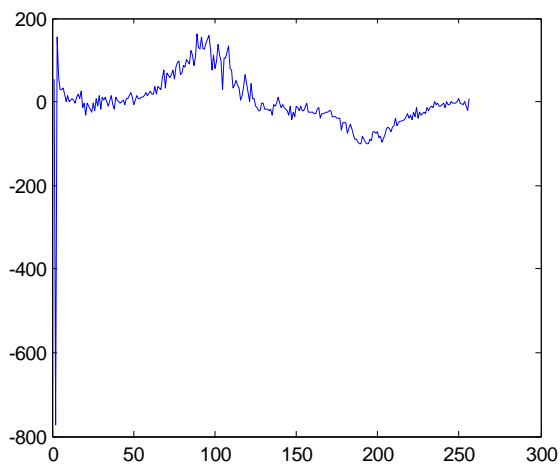


Figure 3 Histogram Difference of Two Halves of Brain Image

3. Threshold Calculation- Now that portion of image is selected as threshold which is greater than difference. This threshold will be segmented image considered for tumor portion of image. Fig 4 shows its result




Figure 4 Threshold Image

4. Selecting Tumor- To select tumor region, all other light intensity region should be removed. It can be done by removing all connected components of image which are not part of tumor. So a threshold level can be defined below which these undesired components are removed. Fig. 5 is selected tumor
5. Tumor Region in Brain- In last step, intensity of region which is finally selected as tumor, is raised to highest intensity value and hence this region is marked in the sample brain image. Fig 6 is this image

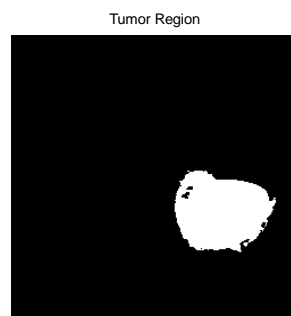


Figure 5 Tumor Region of Brain


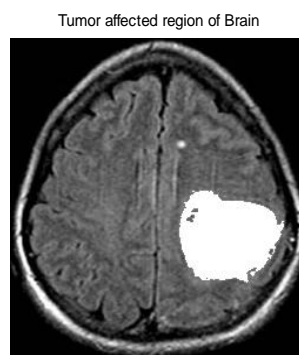


Figure 6 Tumor Portion Projected in Brain by Histogram Thresholding


**B. K-MEANS CLUSTERING BASED MRI BRAIN IMAGE SEGMENTATION**

1. K-Means Clustering – Gray scale image is then applied with K-Means clustering. Here K is number of clusters which is to be decided manually. K is taken 4 numbers. K-Means clustering calculates 4 numbers of centroid and all pixels of image are checked for distance (in terms of intensity) with


these clusters. Pixel is assigned that particular cluster, with which it is nearest, i.e whose intensity matches best with that of pixel. Fig. 8 to Fig. 10 shows 4 numbers of clusters of Fig 7 which is resized gray version of sample image

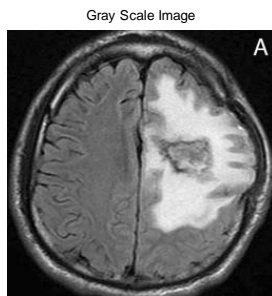


**Figure 7** Resized Gray Scale Image




**Figure8** Cluster No. 1 with intensity Value 19.45



**Figure9** Cluster No. 2 with intensity Value 95.67




**Figure10** Cluster No. 3 with intensity Value 136.64



**Figure11** Cluster No. 4 with intensity Value 211.43

2. Selecting Segmented Image- In a tumor affected brain, tumor is bright in color as compared to its surrounding. So that particular cluster is selected which is having highest intensity value among all 4. Selected cluster is shown in Fig. 11

Cluster with high intensity pixel selected after segmentation

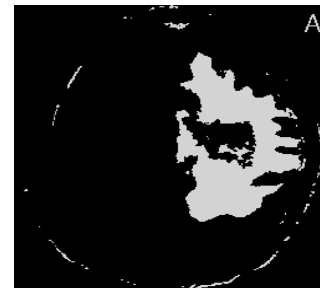


**Figure11** Selected Cluster with Tumor

3. Clearing Border –In the selected cluster image, it is first targeted to found out boundary of selected cluster image. Region inside boundary will be kept dark so that tumor inside it can be highlighted and region outside boundary is kept light so that that region can be removed in next step. Fig.12 is showing this particular image.
4. Filling Holes- In this step any small dark region, surrounded completely by lighter region, are filled, i.e they are also converted into lighter region. Fig. 13 is clustered image with hole filled.

Segmented Image with border clear




**Figure12** Border Cleared Image

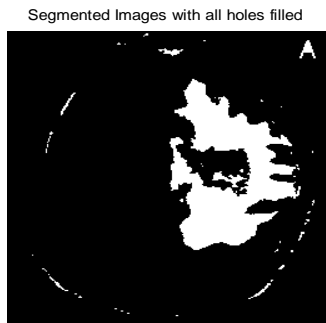


**Figure 13** Image After Holes Filling

5. Selecting Tumor- To select tumor region, all other light intensity region should be removed. So a threshold level can be defined below which these undesired components are removed. Fig. 14 is detected tumor.
6. Tumor Region in Brain- In last step, intensity of region which is finally selected as tumor, is raised to highest intensity value. Fig. 15 is brain image with tumor.

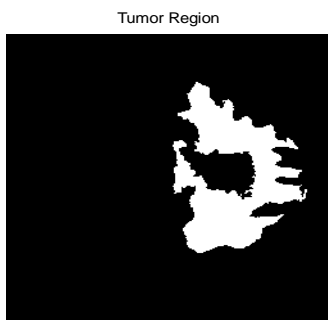

**Figure14** Tumor Region of Brain

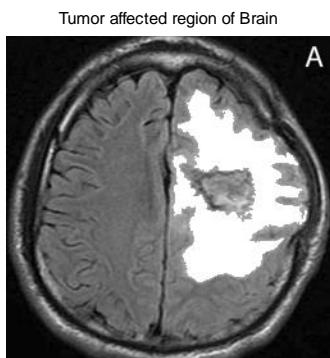


**Figure15** Tumor Portion Projected in Brain by K-Means Clustering

### C. FUZZY C-MEANS CLUSTERING BASED MRI BRAIN IMAGE SEGMENTATION


Fuzzy C-Means Clustering is a multi valued logic that allows, within the same image, intermediate components i.e., member of one fuzzy set to be member of other fuzzy sets.

1. Fuzzy C-Means Clustering –Here degree of membership function, dimension in which brain image will be worked upon and a positive real value greater than 1 has to be defined for membership

function. Fig. 17 is the clustered images after segmentation.

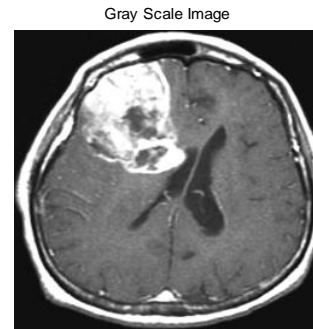


**Figure16** Resized Gray Scale Image

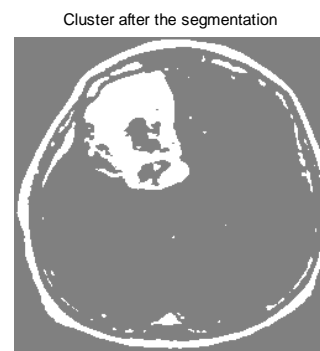


**Figure17** FCM Clustered image after segmentation

2. Clearing Border – In the selected cluster image, region inside boundary will be kept dark so that tumor inside it can be highlighted. Fig.18 is showing this particular image.
3. Filling Holes- In this step any small dark region, surrounded completely by lighter region, are filled, i.e they are also converted into lighter region. Fig. 19 is showing filled hole image

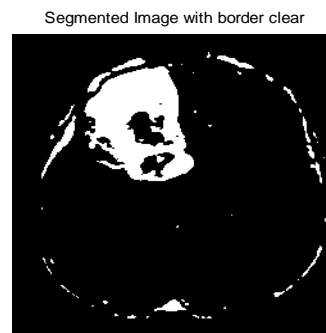


**Figure18** Border Cleared Image

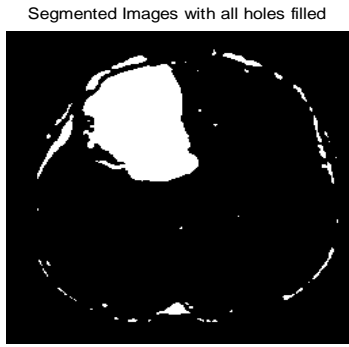


**Figure19** Image After Holes Filling

5. Selecting Tumor- To select tumor region, a threshold level can be defined below which these undesired components are removed. Fig. 20 is tumor region of this brain image.
6. Tumor Region in Brain- Intensity of tumor is raised to highest value and hence marked in the sample brain image. Fig. 21 is brain image over which tumor is highlighted.

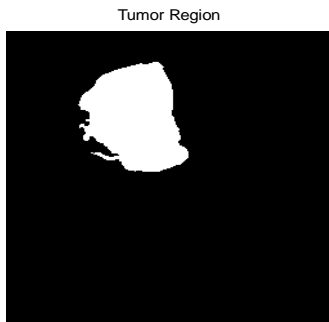

**Figure20** Tumor Region of Brain

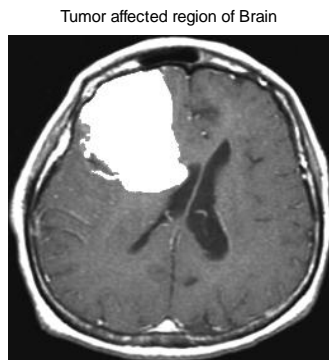

**Figure21** Tumor Portion Projected in Brain by Fuzzy C-Means Clustering

## V. CONCLUSIONS

In this work, Input MRI brain image is RGB color image which is first transformed input gray-scale images and resized to 256 x 256. Then this image is separately applied with Histogram Thresholding, K-Means Clustering and Fuzzy C-Means Clustering Technique. In histogram thresholding, a brain image is partitioned into equal halves vertically and their histogram is compared for intensity of tumor in either of these two halves. In K-means clustering

brain image is distributed in 4 clusters on the basis of their intensity. Tumor cluster intensity will be high which helps in selection of this particular cluster. Similarly in Fuzzy C-Means clustering, image is distributed in two clusters and then tumor cluster is selected. Tumor location in input brain image is compared for three unsupervised technique. On comparing these algorithms by applying over various brain images, it is found out that Fuzzy C-Means clustering is giving good results all the time as compared with other two works. In some brain images, Histogram Thresholding and K-Means clustering are even unable to produce any tumor image which is very clearly shown by FCM.

## REFERENCES

- [1] K. Somasundaram and T. Kalaiselvi, "Automatic Detection of Brain Tumor from MRI Scans Using Maxima Transform", Image Processing (NCIMP 2010)
- [2] Manoj K Kowar and Sourabh Yadav, "Brain Tumor Detection and Segmentation Using Histogram Thresholding", International Journal of Engineering and Advanced Technology (IJEAT), ISSN: 2249 – 8958, Volume-1, Issue-4, April 2012
- [3] Priyanka and Balwinder Singh, "A REVIEW ON BRAIN TUMOR DETECTION USING SEGMENTATION", International Journal of Computer Science and Mobile Computing, ISSN 2320–088X, Vol. 2, Issue. 7, July 2013
- [4] Pankaj Sapra, Rupinderpal Singh and Shivani Khurana, "Brain Tumor Detection Using Neural Network", International Journal of Science and Modern Engineering (IJISME), ISSN: 2319-6386, Volume-1, Issue-9, August 2013
- [5] P. Dhanalakshmi and T. Kanimozhi, "Automatic Segmentation of Brain Tumor using K- Means Clustering and its Area Calculation", International Journal of Advanced Electrical and Electronics Engineering (IJAE), ISSN (Print): 2278-8948, Volume-2, Issue-2, 2013
- [6] Roshan G. Selkar Prof. M. N. Thakare, "BRAIN TUMOR DETECTION AND SEGMENTATION BY USING THRESHOLDING AND WATERSHED ALGORITHM", IJAICT, ISSN 2348 – 9928, Volume 1, Issue 3, July 2014
- [7] A.Sivaramakrishnan and Dr.M.Karnan, "A Novel Based Approach for Extraction of Brain Tumor in MRI Images Using Soft Computing Techniques", International Journal of Advanced Research in Computer and Communication Engineering, ISSN No.- 2319-5940, Vol. 2, Issue 4, April 2013

**Ritu Verma.** received her BE degree in computer science & engineering from C.S.V.T.U Bhilai in 2012 and pursuing Mtech in CSE from R.G.P.V.Bhopal, M.P. From 2013 to 2015.Her area of interest is image processing. She is having one international conference in her credit.

**Sujeet Tiwari** received his B.E. degree in Information Technology from R.G.P.V.Bhopal, M.P. and Mtech in Computer Technology & application From R.G.P.V.Bhopal, M.P.His area of interest is web mining . He is having four international conference in his credit. He has organized four workshops.

**Naazish Rahim** receiver her BE degree in computer science & engineering from G.G.U. Bilaspur(C.G) in 2008 and Mtech in CSE from R.T.U. Rajasthan in 2012.her area of interest is image processing and parallel and distributed computing. She is having 28 national and international conference in her credit.